


# Penlon Prima 320 Anaesthetic Machine

## ANAESTHESIA SOLUTIONS

- ◆ 8.4" TFT colour touchscreen
- ◆ Up to six ventilation modes
- ◆ Optional CO<sub>2</sub> and SpO<sub>2</sub> monitoring
- ◆ Integrated CO<sub>2</sub> absorber and bellows unit with ventilator interface
- ◆ Selectatec compatible back bar
- ◆ Switchable front facing common gas outlet



# Penlon Prima 320 Anaesthetic Machine

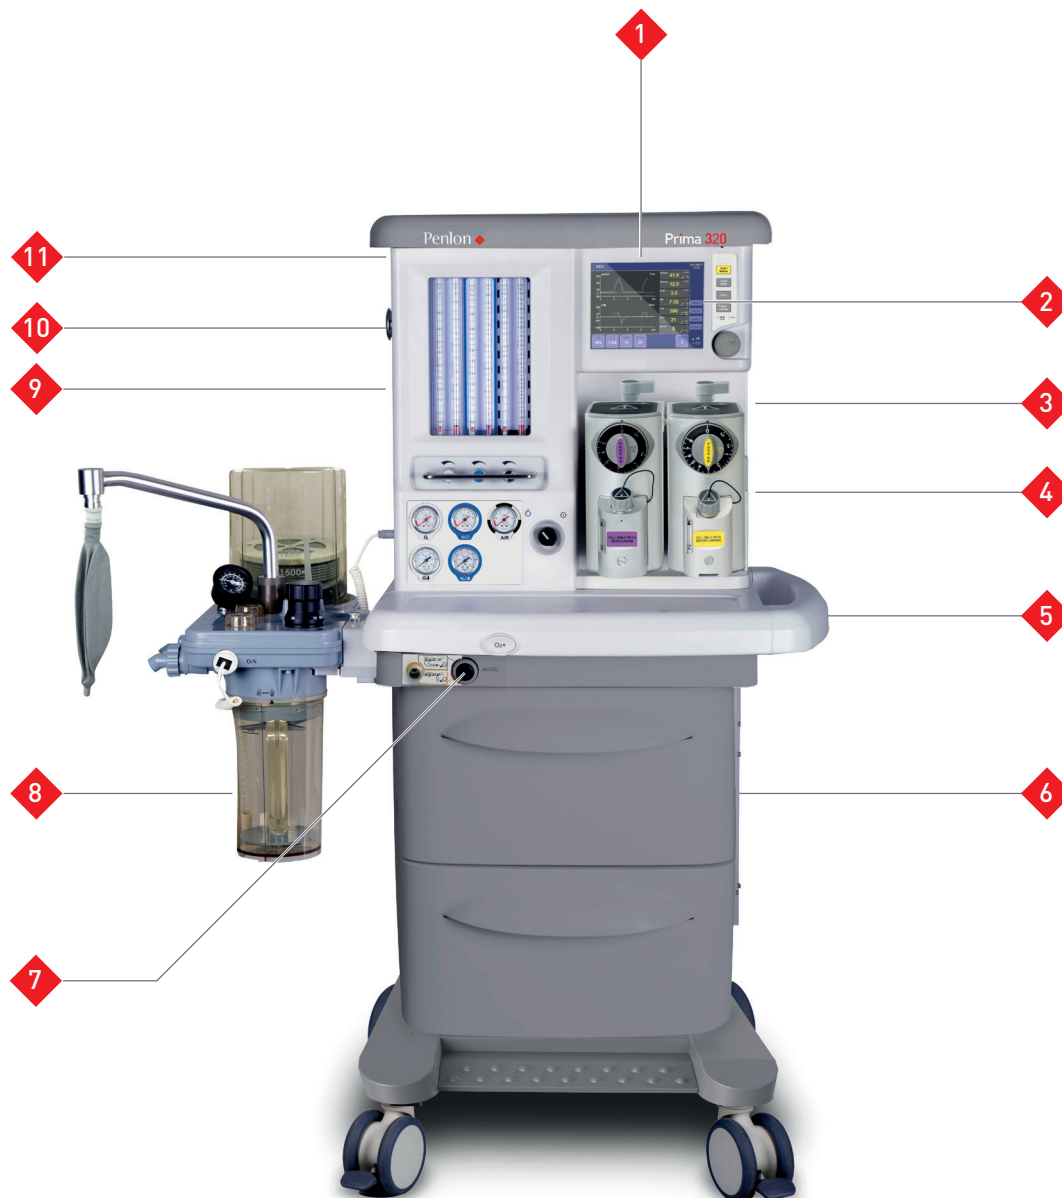

All the features and options you need to configure a system to your exact specification

- 1 8.4" TFT colour touchscreen
- 2 Up to six ventilation modes
- 3 Optional CO<sub>2</sub> and SpO<sub>2</sub> monitoring
- 4 Selectatec® compatible backbar (two stations)
- 5 LED illuminated work spaces
- 6 Large capacity drawer units
- 7 Switchable front facing common gas outlet for open and closed circuit operation
- 8 Integrated CO<sub>2</sub> absorber and bellows unit with ventilator interface
- 9 GCX™ compatible aluminium uprights for additional accessory mounting
- 10 Optional auxiliary O<sub>2</sub> outlet
- 11 Up to three electrical outlets

# The Penlon Prima 320 is a versatile anaesthetic Machine providing the ideal solution for today's operating room.

Clinician-focused choices and benefits, including colour touchscreen display, up to six ventilation modes and optional CO<sub>2</sub> and SPO<sub>2</sub> monitoring.

## System

The Prima 320 anaesthetic machine has an integrated ventilator with up to six ventilation modes; CO<sub>2</sub> absorber with heater and large capacity absorbent canister; and a two station Selectatec™ compatible backbar.

## Flow control and visualisation

The Prima 320 offers:

- Six conventional flow tubes for accurate control, particularly at low flow rates.
- A conventional control system with a mechanical anti-hypoxic device giving enhanced patient safety.
- 8.4" TFT colour touchscreen ventilator display with navigator wheel, push button control and audio/visual indicators.
- Switchable, front facing common gas outlet for open and closed circuit operation.
- Pipeline and cylinder supply pressure gauges.

## Features and accessories

The territory-specific electrical power outlets can be used for ancillary medical devices. The mains power to internal components is supplemented by a backup battery able to maintain power for up to 90 minutes. A convenient and easily accessible O<sub>2</sub> outlet, for attaching an auxiliary flowmeter (order separately), is available as an option. Additional accessories can be mounted using the GCX™ compatible aluminium uprights.

## Additional monitoring

For improved patient safety additional Sidestream CO<sub>2</sub> and SpO<sub>2</sub> monitoring options are also available.

## System components

A versatile anaesthetic machine, combining advanced features and value for money. The Prima 320 is easy to use and maintain, with superb performance.

### 1 Anaesthesia Ventilator

An easy to use, multifunction anaesthesia ventilator with 8.4" TFT touchscreen, designed for adult, paediatric and neonatal patient profiles. Standard specification includes up to six ventilation modes including advanced spontaneous support modes and electronic PEEP. The ventilator has integrated oxygen monitoring and spirometry, plus seamless integration with both the absorber and anaesthetic machine.

### 2 CO<sub>2</sub> Absorber

A high-performance absorber with a ventilator interface as standard that provides ventilator mode switching, triggered by the bag/ventilator control. The unit has a quick-release canister, and the main components are autoclavable. A heater unit is supplied as standard.

### 3 Sigma Delta Vaporizer

Award winning, high-performance market leader, offering multi-choice fill system options.


### 4 Flow Control

The Prima 320 comes with six conventional flow tubes to provide accurate control, particularly at low flow rates. The system has pipeline gas supply inputs for O<sub>2</sub>, N<sub>2</sub>O and Air; and backup cylinder supply inputs for O<sub>2</sub> and N<sub>2</sub>O.

## Maintenance and after-sales support

Penlon is committed to a successful, long-term relationship with all our customers. Our comprehensive warranty provides user peace of mind and after-sales support.

Additional services and warranties can be purchased to meet your particular needs.




## About Penlon ♦

Penlon was founded in 1943 by personnel from the Department of Anaesthesia at Oxford University. One of the first products was the Macintosh Laryngoscope, then a revolutionary design, and still the most widely used today, invented by the late Sir Robert Macintosh, Professor of Anaesthetics.

Today Penlon continues to design, engineer and build high quality anaesthesia products at its UK operations headquarters. The company is proud to have over '70 years' dedicated experience, many awards for product design, and an impressive four Queen's Awards for Enterprise, one for 'Innovation' and three for 'International Trade'.

Penlon devices feature intuitive user interfaces that require minimal operator training, putting clinicians in control, enabling them to focus on what is most important – patient safety and wellbeing.

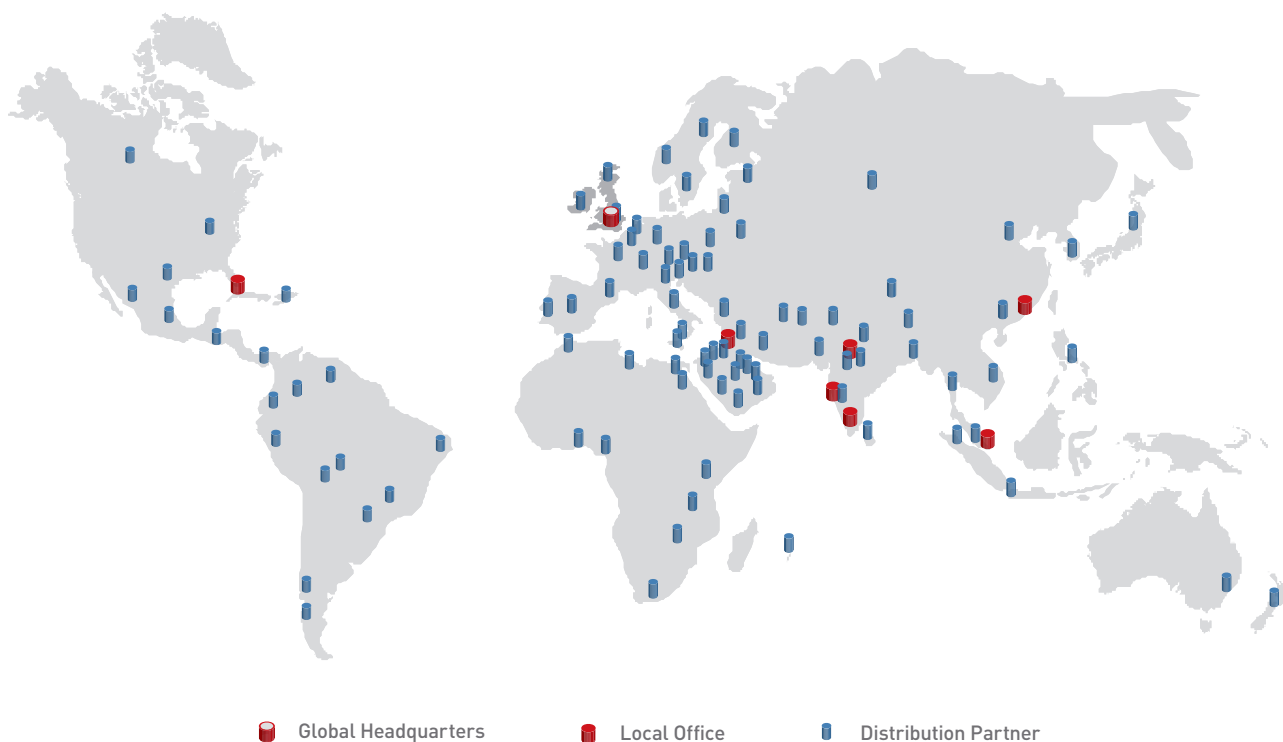

[facebook.com/PenlonGlobal](https://facebook.com/PenlonGlobal)



[linkedin.com/company/penlon-ltd](https://linkedin.com/company/penlon-ltd)



[twitter.com/PenlonGlobal](https://twitter.com/PenlonGlobal)

1639

Doc. No. TT0420SL / August 2020. Penlon, InterMed and Prima are trademarks of Penlon Limited. All other trademarks are the property of their respective owners.

Part of the InterMed Group © Penlon Ltd. 2020 All rights reserved

Penlon Limited

Abingdon Science Park  
Barton Lane, Abingdon  
OX14 3NB, UK

General

t +44 (0) 1235 547000  
f +44 (0) 1235 547041  
w [www.penlon.com](http://www.penlon.com)

International Sales

t +44 (0) 1235 547001  
f +44 (0) 1235 547021  
e [international.sales@penlon.com](mailto:international.sales@penlon.com)

UK Sales

t +44 (0) 1235 547036  
f +44 (0) 1235 547023  
e [uk.sales@penlon.com](mailto:uk.sales@penlon.com)

Technical Support

t +44 (0) 1235 547060  
f +44 (0) 1235 547061  
e [tech.support@penlon.com](mailto:tech.support@penlon.com)

